




# CO-A4 Carbon Monoxide Sensor 4-Electrode



#### Figure 1 CO-A4 Schematic Diagram

**PATENTED** 

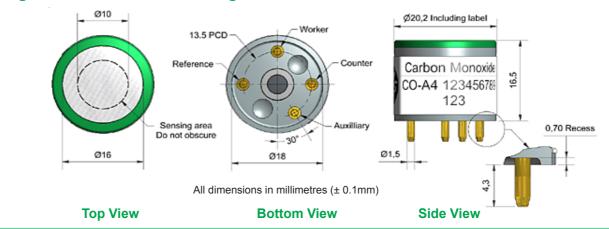

PERFORMANCE	Response time Zero current Noise* Range Linearity Overgas limit	nA/ppm in 2ppm CO t <sub>90</sub> (s) from zero to 10ppm CO nA in zero air at 20°C ±2 standard deviations (ppb equivalent) ppm limit of performance warranty ppm CO error at full scale, linear at zero, 15ppm CO maximum ppm for stable response to gas pulse ense AFE low noise circuit	220 to 375 < 20 -100 to +10 20 500 < ± 1 2000
LIFETIME	Zero drift Sensitivity drift Operating life	ppb equivalent change/year in lab air % change/year in lab air, monthly test months until 50% original signal (24 month warranted)	< ±100 < 10 > 36
ENVIRONMENTAL	, ,	(% output @ -20°C/output @ 20°C) @ 5ppm CO (% output @ 50°C/output @ 20°C) @ 5ppm CO nA change from 20°C nA change from 20°C	50 to 85 110 to 125 10 to 40 -120 to -200

	C	RC	SS	SEI	NSI	TI	VI	ITY	,
--	---	----	----	-----	-----	----	----	-----	---

Filter capacity	ppm·hrs		$H_2S$	250,000
H <sub>2</sub> S sensitivity	% measured gas @	5ppm	$H_2^{-}S$	< 0.1
NO <sub>2</sub> sensitivity	% measured gas @	5ppm	$N\overline{O}_2$	< -2
Cl <sub>2</sub> sensitivity	% measured gas @	5ppm	Cl <sub>2</sub>	< 0.1
NO sensitivity	% measured gas @	5ppm	NŌ	< -2
SO <sub>2</sub> sensitivity	% measured gas @	5ppm	SO <sub>2</sub>	< 0.1
H <sub>2</sub> sensitivity	% measured gas @	100ppm	H <sub>2</sub> at 20°C	< 10
C <sub>2</sub> H <sub>4</sub> sensitivity	% measured gas @	100ppm	$C_2H_4$	< 0.5
NH <sub>3</sub> sensitivity	% measured gas @	20ppm	NH <sub>3</sub>	< 0.1

	11113 331131111111	70 mededi ed gae 🍪 Zeppin - mig	<b>0.</b> .
KEY	Temperature range	°C	-30 to 50
<b>SPECIFICATIONS</b>	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous	15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Load resistor	$\Omega$ (AFE circuit is recommended)	33 to 100
	Weight	g	< 6



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

**NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.





## **CO-A4** Performance Data

### Figure 2 Sensitivity Temperature Dependence

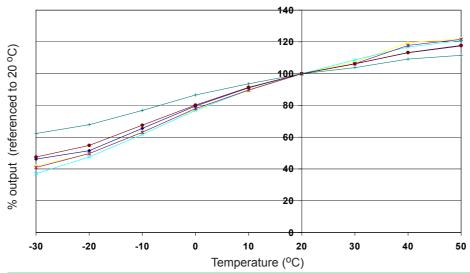


Figure 2 shows the temperature dependence of sensitivity at 2ppm CO.

This data is taken from a typical batch of sensors.

#### **Figure 3 Zero Temperature Dependence**

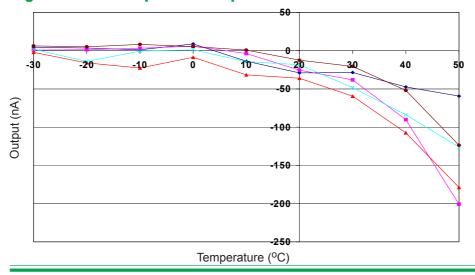


Figure 3 shows the variation in zero output of the working electrode caused by changes in temperature, expressed as nA.

This data is taken from a typical batch of sensors.

Contact Alphasense for futher information on zero current correction.

## Figure 4 Linearity from 0 to 1ppm

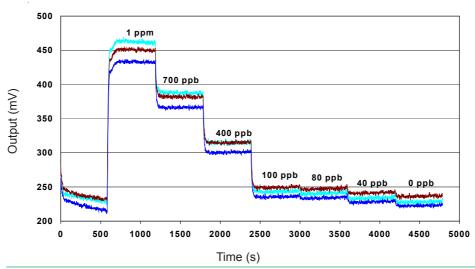


Figure 4 shows response from 0 to 1ppm CO.

Use of Alphasense AFE circuit reduces noise to 20ppb, with the opportunity of digital smooting to reduce noise even further

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (©ALPHASENSE LTD) Doc. Ref. COA4/OCT14