




H2S-AH Hydrogen Sulfide Sensor



Figure 1 H2S-AH Schematic Diagram

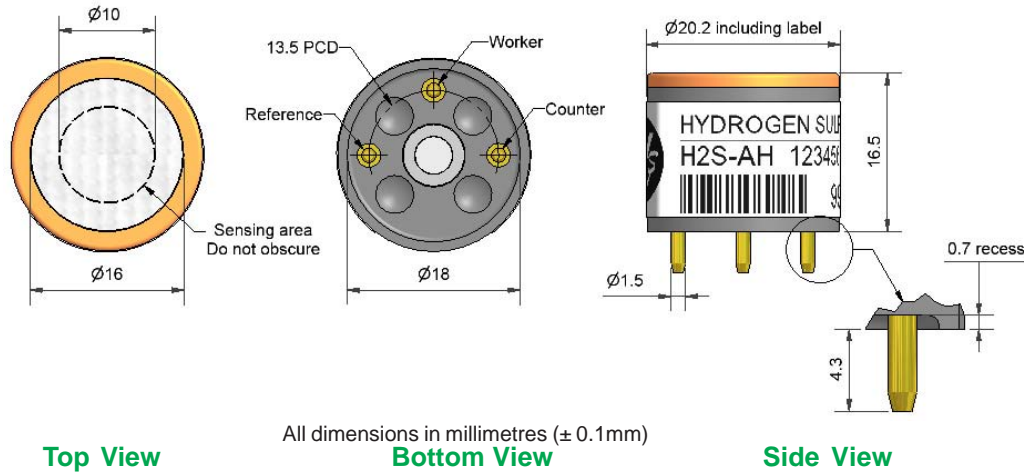

All dimensions in millimetres (± 0.1 mm)

Top View

Bottom View

Side View

Technical Specification

PERFORMANCE	Sensitivity	nA/ppm in 20ppm H ₂ S	950 to 1400
	Response time	t ₉₀ (s) from zero to 20ppm H ₂ S	< 25
	Zero current	ppm equivalent in zero air	< ± 0.15
	Resolution	RMS noise (ppm equivalent)	< 0.05
	Range	ppm H ₂ S limit of performance warranty	50
	Linearity	ppm error at full scale, linear at zero and 20ppm H ₂ S	0 to -2.5
	Overgas range	maximum ppm for stable response to gas pulse	250
LIFETIME	Zero drift	ppm equivalent change/year in lab air	< 0.1
	Sensitivity drift	% change/year in lab air, monthly test	< 4
	Operating life	months until 80% original signal (24 month warranted)	> 24
ENVIRONMENTAL	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 20ppm	80 to 90
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 20ppm	100 to 111
	Zero @ -20°C	ppm equivalent change from 20°C	< ± 0.3
	Zero @ 50°C	ppm equivalent change from 20°C	< ± 0.15
CROSS SENSITIVITY	SO ₂ sensitivity	% measured gas @ 20ppm	< 10
	NO sensitivity	% measured gas @ 50ppm	< 2
	NO ₂ sensitivity	% measured gas @ 10ppm	< -30
	Cl ₂ sensitivity	% measured gas @ 10ppm	< -25
	H ₂ sensitivity	% measured gas @ 400ppm	< 0.15
	C ₂ H ₄ sensitivity	% measured gas @ 400ppm	< 0.15
	CO sensitivity	% measured gas @ 400ppm	< 1.5
NH ₃ sensitivity	% measured gas @ 20ppm	< 0.1	
KEY SPECIFICATIONS	Temperature range	°C	-30 to 50
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous	15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Weight	g	< 6

NOTE: all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.



H2S-AH Performance Data

Technical Specification

Figure 2 Sensitivity Temperature Dependence

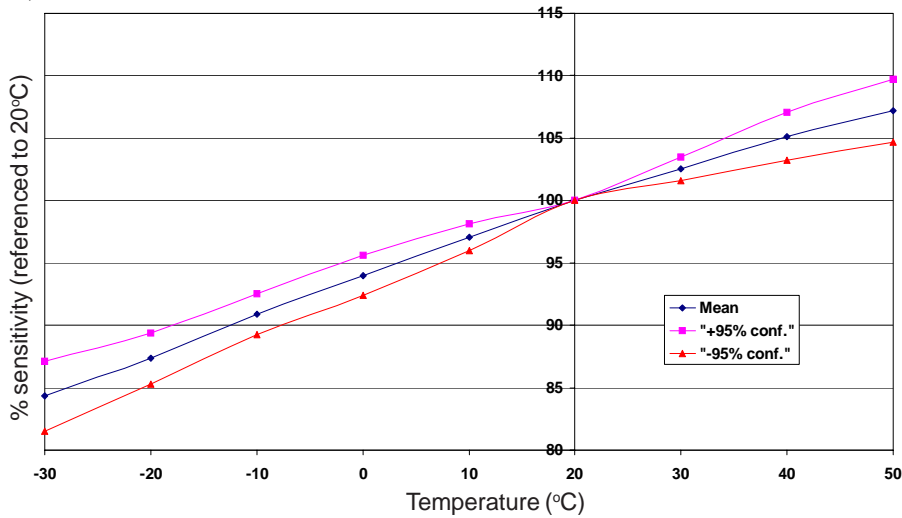


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and \pm 95% confidence intervals are shown.

Figure 3 Zero Temperature Dependence

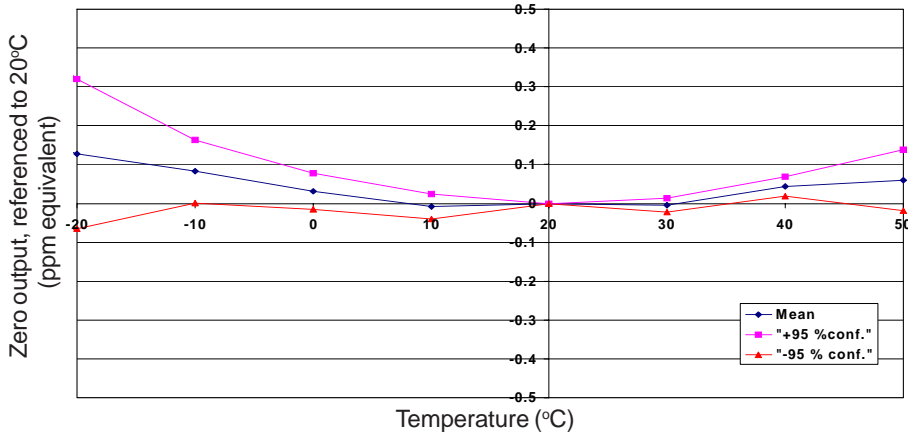


Figure 3 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent.

This data is taken from a typical batch of sensors. The mean and \pm 95% confidence intervals are shown.

Figure 4 Sensitivity Long Term Stability

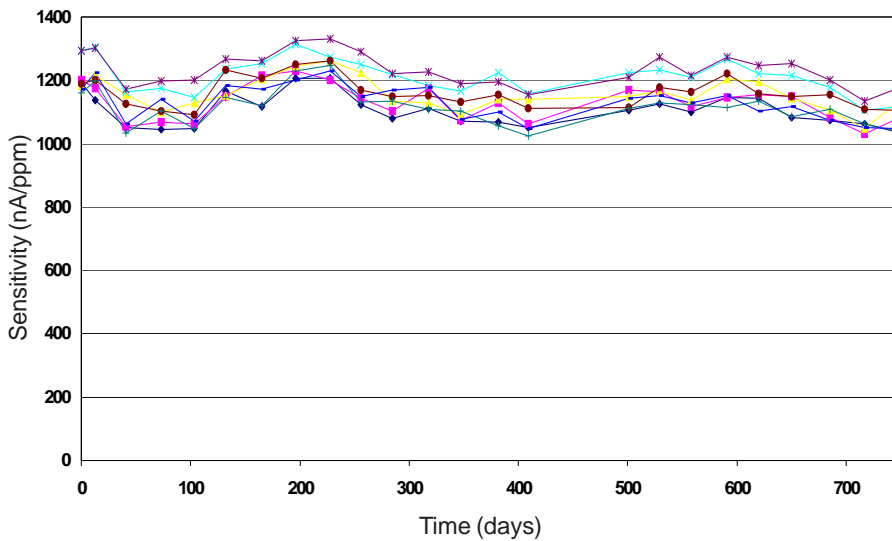


Figure 4 shows the excellent long term stability of the H2S-A1 which results from the combination of a patented design, superior electrochemistry and good process control.

Sensors were stored in extreme humidity/temperature conditions, simulating real usage.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within it (©ALPHASENSE LTD) Doc. Ref. TDS/H2SAH/Issue 12